



K149 Product Show



two-channel




Single channel

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 Equipped with power-off and pole dropping function, remote control can also be added for pole dropping control;
- 3、 LED indicator, valid card showing green, illegal card showing red;
- 4、 Card can be set "with memory" or "without memory";
- 5、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 6、 Compatible with IC, ID card, scanning and face recognition;
- 7、 With unified and standard external electrical interface to facilitate system integration;
- 8、 Extensible to realize access control, attendance, fees and other functions;
- 9、 Can be used outdoors completely, one machine can be used as a lane.

Product Size

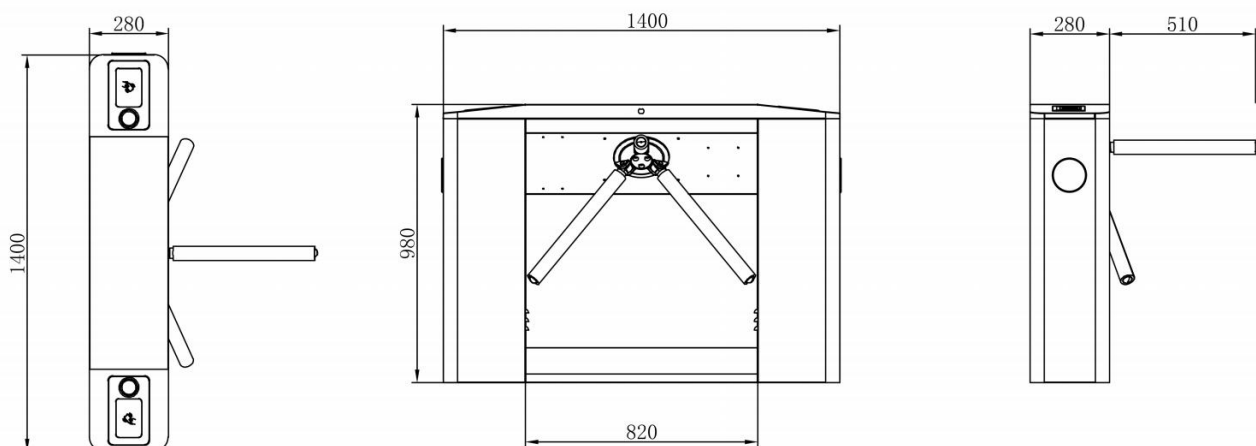

Parameter

Size (L*W*H)	1400*280*980mm
Pass width	550mm
Power	35W
Material	δ=1.5mm SUS304
Bar Material	SUS201
Movement	Semi-Auto tripod turnstile movement with anti-pass back function
Indicator Light	RGB light+Dynamic indicator light
Power Supply	24V 50W
Control Unit	Main board
Communication Interface	Dry contact/ RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share



Product model: K149

 **Turboo**




Turboo Automation Co., Ltd

***Scan our QR
code to follow***



official accounts

 Telephone: 86-0755-23305213; 86-0755-29809981;

 Head Address : 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134 , Guihua Community,Guanlan Street,Longhua District,Shenzhen ;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi ;

FOR A SAFER WORLD.