

Product model: Z315



Z315 Product Show




FOR A SAFER WORLD.

Functions & Features

- 1、Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、Card can be set "with memory" or "without memory" functions;
- 3、With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、Compatible with IC, ID card, scanning and face recognition,etc.
- 6、Two modes of operation are available: open or closed.
- 7、Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

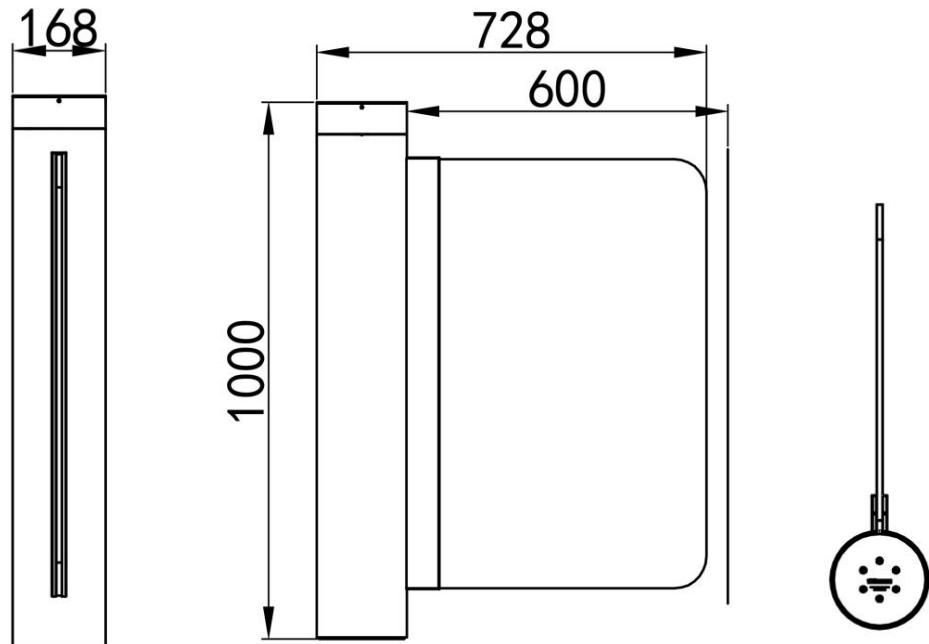

Parameter

Size (L*W*H)	168*168*1000mm
Pass width	600-900mm
Power	50W
Material	$\delta=2.2\text{mm}$ SUS304 Round tube
Bar Material	$\delta=10\text{mm}$ Clean Acrylic
Movement	Servo Swing Gate movement
Drive Unit	200W servo
Power Supply	24V 500W
Control Unit	Servo control system
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share

