



Product model: Z318

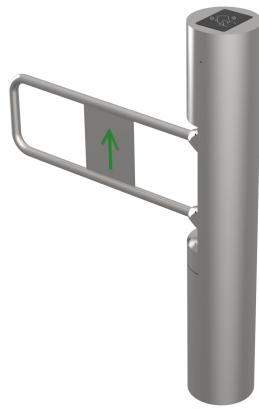


Z318 Product Show

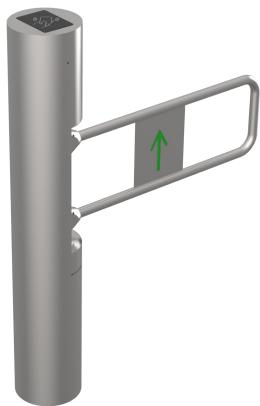

Functions & Features

- 1、Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3、Card can be set "with memory" or "without memory" functions;
- 4、With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6、Compatible with IC, ID card, scanning and face recognition,etc.
- 7、Two modes of operation are available: open or closed.
- 8、Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

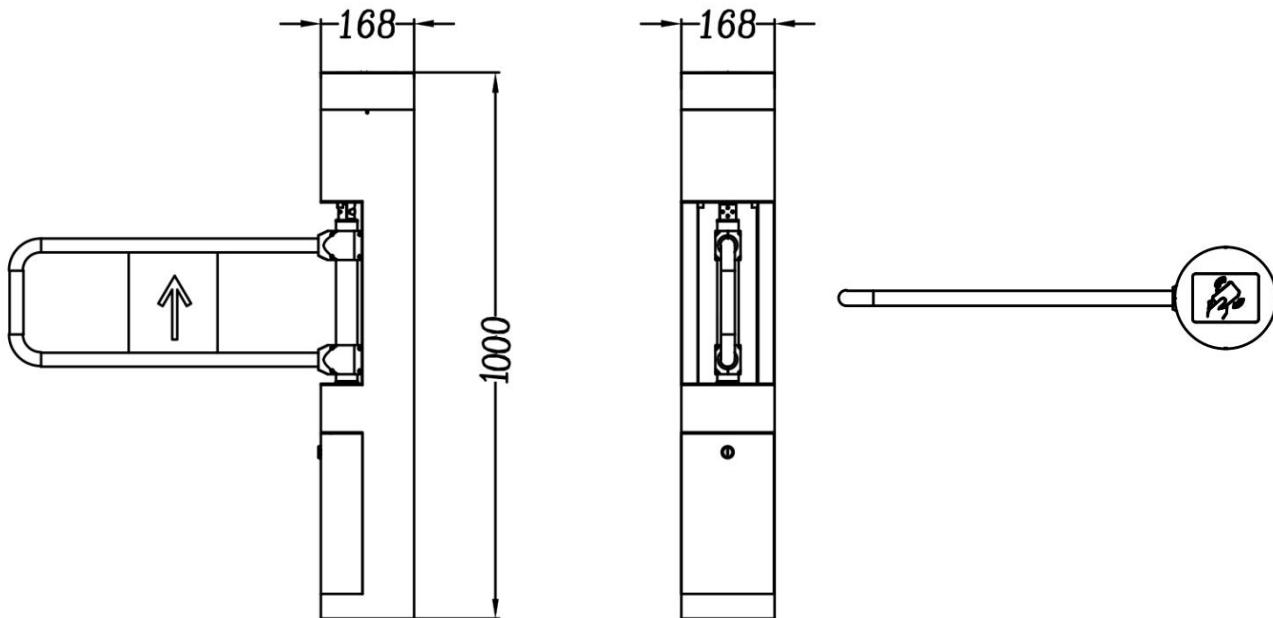

Parameter

Size (L*W*H)	168*168*1000mm
Pass width	600-900mm
Power	50W
Material	$\delta=2.2\text{mm}$ SUS304 Round tube
Bar Material	SUS304+Green arrow
Movement	Brushless Swing Gate movement
Drive Unit	Brushless DC Motor 90K 40W
Power Supply	24V 150W
Control Unit	Brushless control system
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share



Turboo Automation Co., Ltd



**Scan our QR
code to follow**



official accounts



Telephone: 86-0755-23305213; 86-0755-29809981;



Head Address : 1st-4th Floor, Building #1, Guanjie Factory area, guanguang Road #1134 , Guihua Community, Guanlan Street, Longhua District, Shenzhen ;

Production base: Factory Building No.1, Zhongzhi Science and Technology Park, National High-tech Zone, Fuzhou City, Jiangxi ;